


HEŠA®
KOMERC

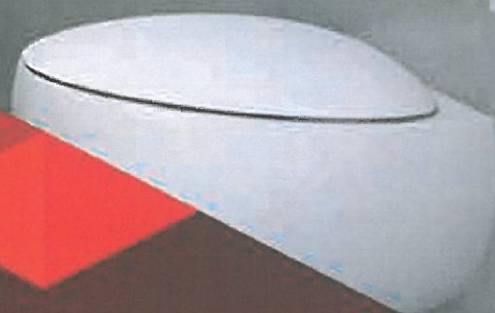

NK LUX

NK LUX


Radijator „NK LUX“ je cevasti radijator koji svojim oblikom i dizajnom zauzima vrlo malo prostora, čija je osnovna namena zagrevanje vazduha u kupatilima, ali je moguća primena i u drugim prostorijama (radne, dnevne, dečije sobe, kuhinje, ali i poslovne prostorije).



Ovaj radijator izrađen je od čeličnih šavnih cevi (Č 0146), od materijala DC01, u standardu EN 10305-3, EN 10305-5, trapezastog je profila dimenzije 50x35x25 mm, a rebra su od okruglih cevi prečnika Ø25 mm, sa radijusom krivine r 1475 mm. Kao grejni fluid koristi se topla voda, dok se predaja toplote vrši konvekcijom i zračenjem. Radijator poseduje 4 priključka dimenzije 1/2". Maksimalni pritisak pri ispitivanju je 10,14 bara (0,10 Mpa), a radni pritisak je 6 bara.

Tehničke karakteristike (visina, širina, raspon priključaka, težina, zapremina, toplotna moć - EURO NORMA 442 i dimenzije priključaka) prikazane su u tabeli.

Montaža radijatora je izuzetno jednostavna i laka, ugradna dubina prilikom montaže od 65 mm - 110 mm, a uputstvo o montaži, sa garantnim listom i kompletom za montažu, koga čine 3 ili 4 nosača za montažu zavisno od veličine radijatora sa pripadajućim vijcima i tiplovima, odzračna slavina 1/2", niklovan čep 1/2", nalaze su u pakovanju, kao i zaštitne plastične kape.



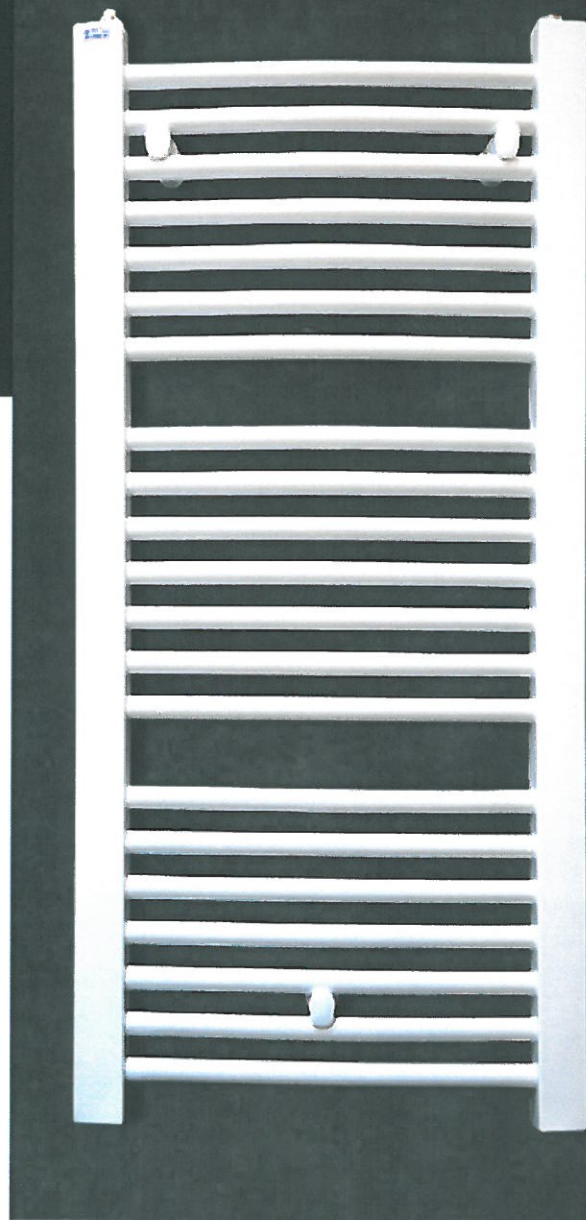


BESCHREIBUNG

Der Heizkörper „NK LUX“ ist ein Rohrheizkörper, der mit seiner Form und Design sehr wenig Platz einnimmt und hat den Zweck die Luft in Badezimmern zu erwärmen, ist aber möglich diesen Heizkörper auch in anderen Räumen zu verwenden (Arbeitszimmer, Wohnzimmer, Kinderzimmer Küche aber auch in den Geschäftsräumen).

Diese Heizkörper sind aus Stahl-Naht-Rohren (Č 0146), aus Werkstoff DC01, nach Norm EN 10305-3, EN 10305-5, gefertigt, hat ein Trapez Profil in der Abmessung 50x35x25 mm, und sind mit einem Durchmesser Ø25 mm aus Rundrohr, mit Kurvenradius von r 1475 mm ausgeführt. Als Heizfluid wird Warmwasser verwendet, während die Wärmeabgabe durch Konvektion und Strahlung erfolgt. Der Heizkörper besitzt 4 Anschlüsse der Abmessung 1/2". Maximaler Prüfdruck beträgt 10,14 Bar (0,10 Mpa), und der Betriebsdruck ist 6 Bar. Technische Eigenschaften (Höhe, Breite und Portbereich, Gewicht, Volumen, Heizwert - EURO NORMA 442 und Abmessung der Anschlüsse /Port) sind in der Tabelle dargelegt. Montage von Heizkörpern ist außerordentlich einfach und leicht, Einbautiefe bei der Montage liegt zwischen 65 mm - 110 mm und die Montageanleitung, mit dem Garantieschein und Montagesatz, bestehend aus 3 oder 4 Montagehalterungen, abhängig von der Heizkörpergröße, samt zugehörigen Schrauben und Dübeln, Entlüftungsventil 1/2", vernickelter Abdeckung 1/2", befinden sich in der Verpackung, wie auch die Schutzplastikkappen.

RAL VARIJACIJE BOJA | RAL COLOUR VARIATIONS

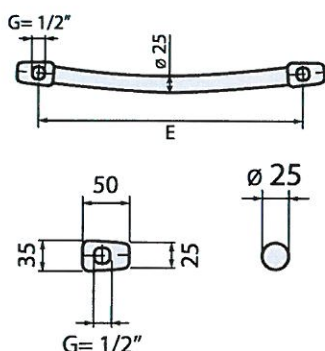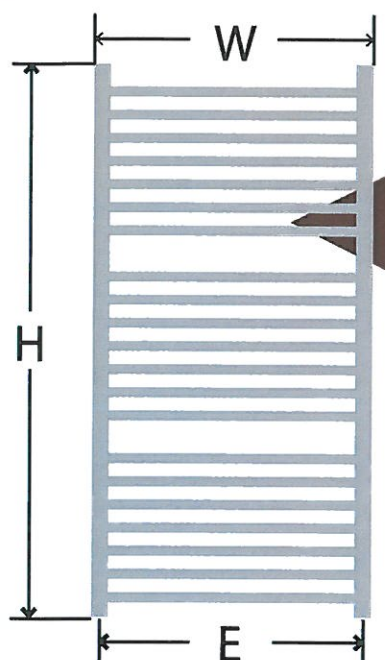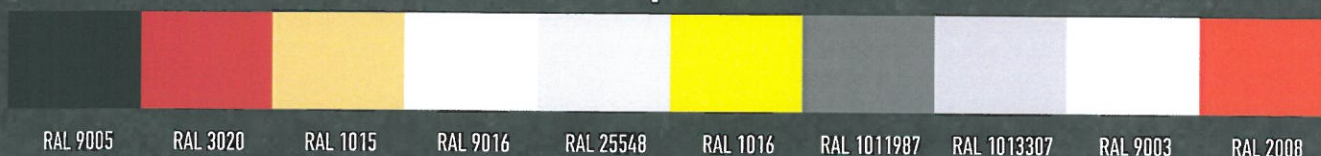

Visina H (mm)	Širina W (mm)	Rastojanje prijeljučka E (mm)	Broj cevi	Težina weight (kg)	Zapremina cubage (L)	Toplotni učinak 90/70/20 °C ΔT 50 K High Thermal power (watt)	Toplotni učinak 75/65/20 °C ΔT 50 K Low Thermal power (watt)	Toplotni učinak 55/45/20 °C ΔT 30 K Low Thermal power (watt)	Dimenzije prijeljučka G (")
750	400	330	14	5,2	3,5	491	394	212	1/2
1120	400	330	21	8	5,3	744	594	317	1/2
1490	400	330	28	10,8	7	993	793	423	1/2
1860	400	330	35	13,2	8,6	1234	983	520	1/2
750	500	430	14	6,2	4	588	468	248	1/2
1120	500	430	21	9,2	6	882	704	373	1/2
1490	500	430	28	12,2	8	1.183	939	491	1/2
1860	500	430	35	15,6	10	1.453	1.161	620	1/2
750	600	530	14	7	4,6	675	539	286	1/2
1120	600	530	21	10,4	6	1.009	808	433	1/2
1490	600	530	28	13,8	9,6	1.351	1.082	582	1/2
1860	600	530	35	17,2	11,5	1.678	1.334	701	1/2
750	700	630	14	9,1	5	777	619	327	1/2
1120	700	630	21	13,4	7,6	1.158	922	487	1/2
1490	700	630	28	15,6	10,6	1.515	1.206	637	1/2
1860	700	630	35	19,2	13	1.929	1.536	811	1/2



DESCRIPTION

"NK LUX" radiator is a tubular radiator that occupies very little space owing to its shape and design and its main purpose is to heat the air in the bathrooms but it can be used in other rooms as well (studies, living rooms, children's rooms, kitchens and business premises as well).

This radiator is made of seamed steel tubes (C 0146), of DC01 material, according to EN 10305-3 and EN 10305-5 standards, of trapezoidal profile and of 50x35x25 mm in size, with ribs formed as tubular pipes of Ø25 mm in diameter, with r 1475 mm radius of curve. Hot water is used as a heat transfer fluid and the heat is transferred by methods of convection and radiation. The radiator is equipped with 4 fittings of 1/2" in size. Maximum pressure when tested is 10,14 bar (0,10 Mpa) and operating pressure is 6 bar. Technical specifications (height, width, range between fittings, weight, capacity, calorific value – EURO NORMA 442 and dimensions of fittings) are shown in the table. Installation of the radiator is exceptionally simple and easy, the mounting depth for installation is at 65 mm – 110 mm, and the installation instruction with the warranty paper and the assembly kit, consisting of 3 or 4 brackets for the mounting, depending on the size of the radiator, with accompanying screws and plugs, 1/2" air vent, 1/2" nickel plated cap as well as protective plastic caps are included in the set.